


User Manual

Remote Controls

IK2 Transmitters

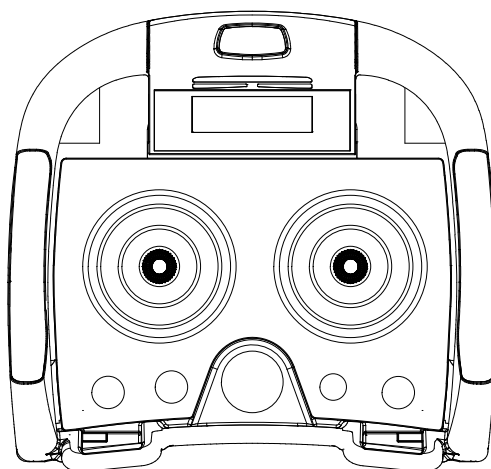

Revision history*Table of revisions*

Date	Changed	Rev
May 2021	Added trouble shooting and start-up information for TR2400	0201
December 2018	Rebranded to Danfoss	0101

Contents

Safety instructions

FCC rules.....	4
General safety.....	4
Safety warnings.....	5

Technical description

IKx dimensions and identification.....	6
IK Transmitters Start up (400-900Mhz).....	7
IK Transmitters Start up (2.4 GHz).....	8
IK2 Detailed description.....	9

Maintenance

Maintenance tips.....	10
Troubleshooting (400-900 MHz).....	10
Troubleshooting 2.4GHz.....	10

Charger and battery

Charger and battery.....	12
BC70K and BT11K specifications.....	12
BC70K Battery Charger Set-up.....	12
BC70K Charger LEDs Status	13
Battery Charging Recommendations.....	13
BC70K Battery Charger Dimensions.....	14

Safety instructions

FCC rules

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules.

Changes or modifications not expressly approved by the manufacturer can void the user's authority to operate the equipment.

To comply with FCC RF exposure compliance requirements, this device and its antenna must not be collocated with, or operating in conjunction with, any other antenna or transmitter, may not cause harmful interference, and must accept any interference received, including interference that may cause undesired operation.

The limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Warning

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. l'appareil ne doit pas produire de brouillage, et
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IK2 General Safety

The following safety instructions must be read carefully to install and use the product properly, and to keep it in perfect working condition, and to reduce the risk of misuse.

- Strictly adhere to the installation instructions contained in this document.
- Make sure that professional and competent personnel carry out the installation.
- Ensure that all site and prevailing safety regulations are fully respected.
- Make sure that this document is permanently available to the operator and maintenance personnel.
- Keep the transmitter out of reach of non-authorized personnel.
- Remove the transmission key when the set is not in use.
- Check each working day the STOP button and other safety measures. When in doubt, press the STOP button.
- Whenever several sets have been installed, make sure the transmitter is the right one. Identify the machine controlled on the label for this purpose on the transmitter or by using the display (in case it has one).
- Service the equipment periodically.
- When carrying out repairs, use spare parts supplied by Danfoss only.

Warning

Potential damage to the operator or the product. Do not use this product on machines in potentially explosive atmospheres unless the model is ATEX/RATEX certified to work in such conditions.

Safety instructions

IK2 Safety Warnings


Potential damage to operator and product.

Follow the guidelines below to reduce risk of injury to the operator and the product.


- Use the device with the manufacturer's battery and battery charger (if applicable).
- Only allow qualified personnel to operate the equipment.
- Always set the STOP button in the off position when not in use.
- Always press STOP before plugging in tether cable (if applicable).
- Remove the Tether connection on the transmitter First (if applicable).
- Do not operate product when visibility is limited.
- Make sure product is compatible with the machine.
- Avoid knocking or dropping the product.
- Do not use the product if a failure is detected.

Changes or modifications not approved by Danfoss can void the user's authority to operate this product.


Quick reference precautions

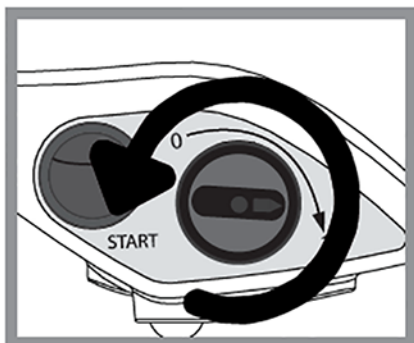


Remove the transmission key only when the set is not in use or to deny the access

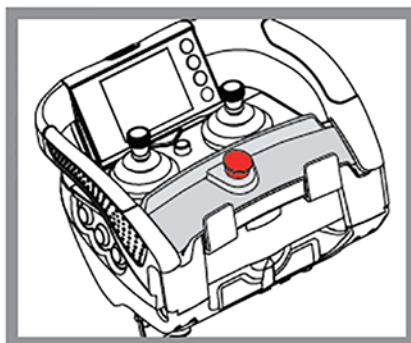

When in doubt, press the STOP button

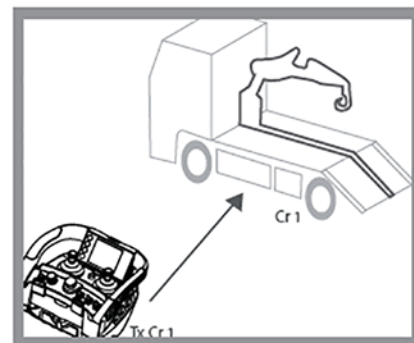


Make sure the transmitter works with the machine to be handled

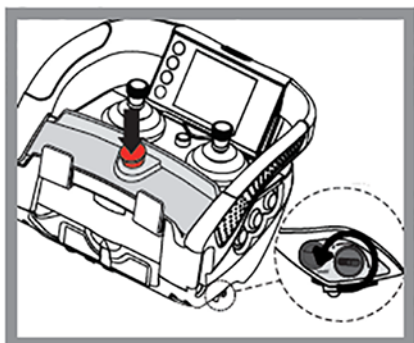

After use set the contact key and the STOP button



Do not use the set when visibility is limited

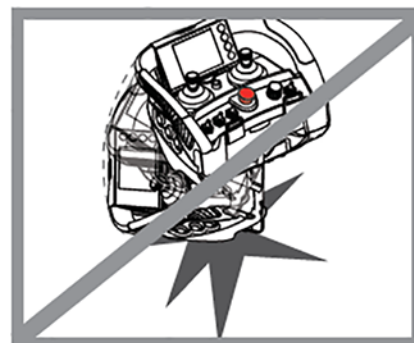


Avoid knocking or dropping the set

Technical description

IKx dimensions and identification

The illustration below details dimensions and highlights product components.

Dimensions in mm

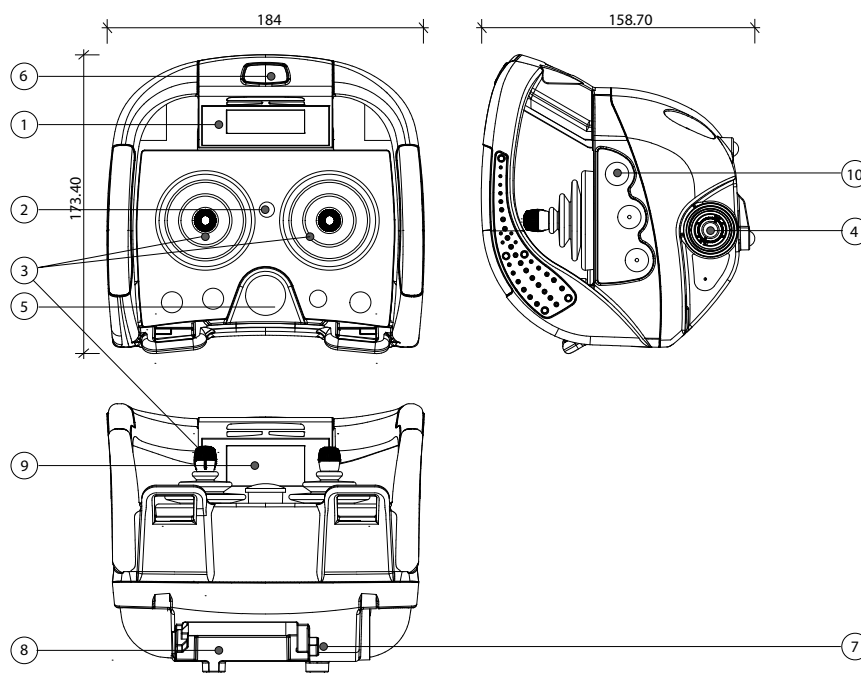


1. Label for crane identification
2. LED
3. Maneuver elements
4. Multi-key or Key + START Button
5. STOP button
6. Optional: range limiter
7. External and extractable EEPROM module
8. Battery
9. Monochrome display
10. Lateral push buttons

Technical description


IK Transmitters Start up (400-900Mhz)

Use the information below to properly turn the transmitter ON (OPERATION mode).

1. Place a charged battery in the transmitter. The charge must be done following the instructions of the Battery Chargers' Manual.




2. Turn the contact key.




3. Push and pull out the STOP button.

LED will flash orange-green pulse. If the transmitter has LCD, it displays the identification of the machine and battery level (only if it has been pre-programmed).



4. Press the start button. The green LED will now light to indicate the transmitter is transmitting. Once the Tx is connected, press any maneuver button and its corresponding relay will be activated. Check to make sure all other maneuvers work in a coherent way with the expected movements.



Technical description

IK Transmitters Start up (2.4 GHz)

In order to turn the transmitter ON (OPERATION mode), please follow these steps:

Start up the device





1. Place a charged battery in the transmitter.

The battery must be charged following the instructions of the Battery Charger Manual.

2. Turn the contact key or Multikey to the position "I." It is not necessary to switch the contact key off after use, however, it may be removed in order to deny access to the transmitter.
3. Push and pull out the **STOP** button.



LED status (blue)



LED will flash, blinking blue until it reaches the Stand-by mode (fixed blue). If the transmitter includes a Display, it will display the identification of the machine, as well as the battery level, if it has been pre-programmed.

4. Press the **START** button, and wait for the status LED to turn to fixed green.

LED status (green)



The status LED will start blinking green, meaning the transmitter is trying to connect with the receiver. Once the Tx is linked, LED will turn to fixed green.

5. Press any of the transmitter's maneuver buttons and its corresponding relay will be activated.
6. Check to make sure all the maneuvers work in a coherent way with the expected movements by checking the supplied production sheet, included with the system.

Technical description

IK2 Detailed description

Description	Value
Stop Function (400 - 900 MHz)	Cat. 3-PLd
Stop Function (2.4 GHz)	Cat3 - PLe
Ingress Protection rating	IP65/NEMA4
Anti-condensation system	Goretex Film
Frequency band - ERP	433.050 to 434.040 MHz; ERP<1 mW
	434.040 to 434.790 MHz; ERP<10mW
	869.700 to 870.000 MHz; ERP<5 mW
	902.000 to 928.000 MHz; ERP<1mW
	2405MHz to 2475MHz ; ERP 20dBm/100mW
Range (normal conditions)	100m
Main mechanisms (maximum number)	Joystick (2) or Paddle (4)
Auxiliary mechanisms	Pushbutton, toggle and rotary switches
Removable EEPROM	External
Battery model	BT11K
Battery life	8 hours
Response Time	100ms
Operating temperature range	-20 °C to 70 °C (-4 °F to 158 °F)
Storage Temperature Range (24h)	-25°C to 75°C (-13°F to 167°F)
Storage Temperature Range (long periods)	-25°C to 55°C (-13°F to 131°F)
Relative Humidity	max. 95% without condensation
Weight (with battery)	950 grams
Dimensions LxWxH mm	184 x 173.4 x 158.7
Harness	Belt/shoulder strap
Available Options	
Display	128x64 Graphic LCD
LED Panel	Yes (up to 8 LEDs)
Cable connector	Yes (M12 Connector)
Range limiter	Yes
Associated receivers	R06, R13, R70, MPCAN, MP08, MP20

Maintenance

IK2 maintenance tips

This product is designed for use in an industrial environment that may shorten the product's lifespan. Use these tips to maximize the lifespan of the product.

- Use the hook/belt provided with the transmitter to prevent the transmitter from falling
- Do not clean the transmitter with solvents or pressurized water; use a damp cloth or soft brush for cleaning
- If the push buttons show signs of deterioration, contact the Authorized Technical Service for repair
- Check if the battery contacts are correct, otherwise replace them.
- Ensure that the product is supplied with AAA alkaline batteries or has a rechargeable battery
- Be sure to recharge or replace battery regularly

Maintenance tips quick reference



Troubleshooting (400-900 MHz)









The transmitter has status monitoring LED's which help identify irregularities. The most common signals are contained in the table below:

Color and frequency	Pulse frequency	Description	Action
Green continuous		Working	Operate
Green slow pulses		Latency; no action has been taken for some time	Press START to return to operation mode
Red slow pulses		Low battery signal	Replace or recharge battery
Red fast pulses		EEPROM module missing or corrupt	Check EEPROM and reprogram if necessary
Red double pulses		A maneuver is activated at transmitter start up process; may indicate hardware damage if no order is active	Release maneuver or replace transmitter if necessary
Red continuous		General hardware failure	Replace transmitter

Troubleshooting 2.4GHz

Color and frequency	Pulse frequency	Description	Action
Blue fast pulses		Starting the system; establishing communications with radio and EEPROM	Wait
Blue continuous		Stand-by mode. Set up system, waiting user's action	Press START to enter operation mode

Maintenance

Color and frequency	Pulse frequency	Description	Action
Green fast pulses		Attempting to link with the receiver and waiting its answer	Wait
Green continuous		Working	Operate
Green slow pulses		Latency; no action has been taken for some time	Press START to return to operation mode
Red slow pulses		EEPROM module missing or corrupt	Check EEPROM and reprogram if necessary
Red double pulses		Radio error; radio communications error	Replace transmitter
Red continuous		General hardware failure	Replace transmitter
Orange slow pulses		Critical battery signal	Replace batteries with charged ones
Orange double pulses		Activated maneuver	Release maneuver

Charger and battery

Charger and battery



Disposal note:

This symbol on the product indicates that it may not be disposed of as household waste. It must be handed over to the applicable take-back scheme for the recycling of electrical equipment.

- Dispose of the product through channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

BC70K and BT11K specifications

BC70K battery charger


Specification	Value
AC power supply	110 – 230 V, 50/60 Hz, $\pm 10\%$, automatic switching
DC power supply, nominal	12 – 24 V

BT11K battery

Specification	Value
Voltage	3.7 V
Capacity	1130 mAh Li-Ion
Charging temperature	0°C to 45°C
Discharge temperature	-20°C to 60°C
Charging mode	Fast (<2.5 h) and intelligent
Weight	23 g

BC70K Battery Charger Set-up

The battery charger has two charging compartments that can simultaneously charge two BT11K batteries. Use the information below to set up the BC70K battery charger.

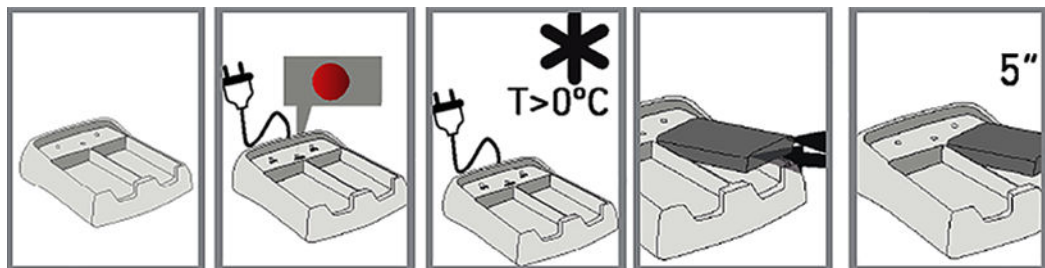

1. Connect the charger to a power source using the cable provided.
The red LED will switch on if the charger is properly connected.
2. Place the batteries in the charger.
3. Optional: If charging two batteries, wait at least five seconds before inserting the second battery into the compartment.

Warning

Possible damage to battery.

Be sure to charge batteries in environments with temperatures over 0°C.

Charger and battery

BC70K Charger LEDs Status

The BC70K charger has a LED for each compartment (**BAT 1** and **BAT 2**) and a common indicator (**POWER**).

LED color / frequency	Description
Green LED / pulsing (BAT 1, BAT 2)	The battery is being charged
Green LED / continuous (BAT 1, BAT 2)	The battery is completely charged
Red LED / pulsing or continuous (BAT 1, BAT 2)	The battery charger fault
Red LED / continuous (POWER)	The charger is properly connected to power source

Battery Charging Recommendations


The battery lifespan is estimated to 500 recharging cycles and is largely dependent on the conditions of use. To maximize the lifespan of the batteries and battery charger, follow these recommendations:

-
- Do not recharge the battery until it is completely flat, as shown with red LED slow pulse on the transmitter
 - Always charge the batteries at temperatures between 0° and 45°C (the batteries will not become fully charged at temperatures exceeding 45°C)
 - Do not leave the battery charger or batteries in a direct sunlight
 - Charge batteries at least once every six months
 - Avoid short circuits between the battery contacts; do not carry charged batteries in toolboxes or next to other metal objects (keys, coins, etc.)
 - Always keep contacts clean
 - Caution! Risk of Explosion if Battery is Replaced by an incorrect type. Non Danfoss Battery use may void warranty
-

Charger and battery

BC70K Battery Charger Dimensions

Dimensions (mm)

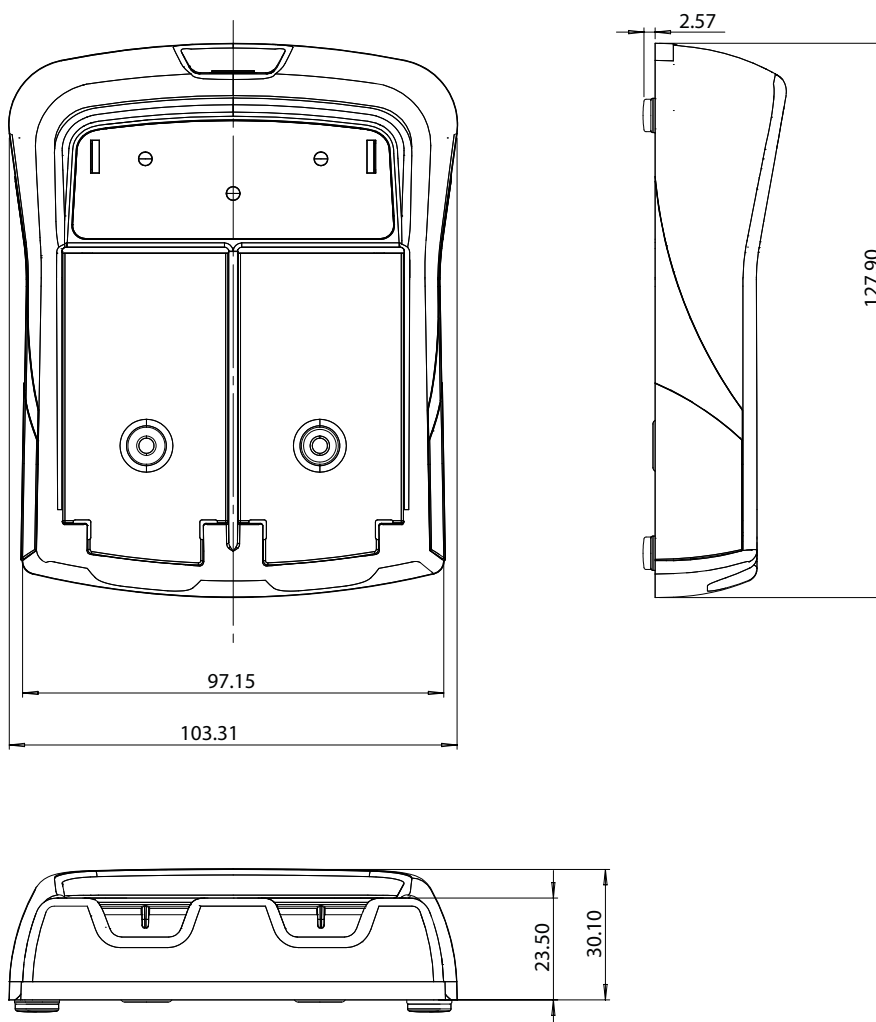

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.